


Part Numbers: 0318-12M & 0319-12M  
 (Qty 2 Included with 5000-12M12M)  
 add -WO to the part number to exclude  
 Glands and Collars

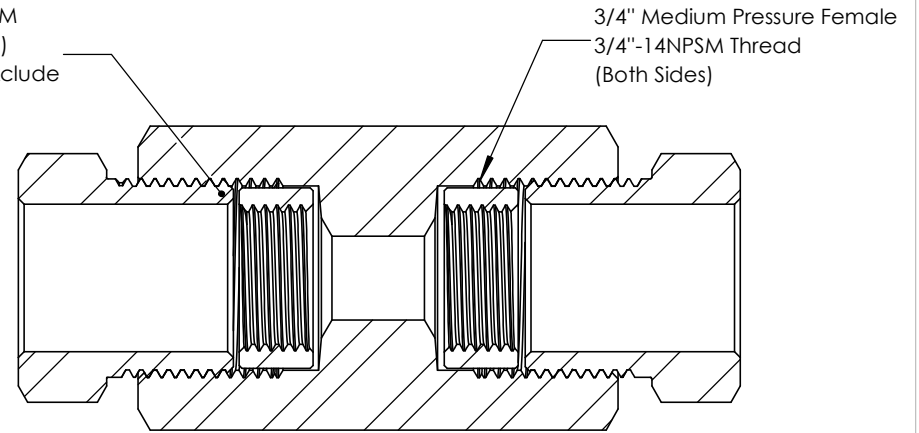

### SECTION A-A

#### REVISION NOTES AND DATES

UNLESS OTHERWISE SPECIFIED:

ALL DIMENSIONS ARE IN INCHES  
 TOLERANCES AS FOLLOWS:  
 1 PLACE DECIMAL (.0): ±.030  
 2 PLACE DECIMAL (.00): ±.020  
 3 PLACE DECIMAL (.000): ±.010  
 ANGLES: ±2°

SURFACE FINISH: 63RMS  
 BREAK ALL EDGES: .010-.015  
 FILLETS & ROUNDINGS: R.015 - 0.30

THREADS UNIFIED CLASS 2A - 2B  
 CHAMFER THREADS 45° TO ROOT  
 30° CHAMFER IS OPTIONAL  
 FOR MALE THREADS ONLY

	NAME	DATE
DRAWN	BM	01/23/2025
CHECKED	KH	01/23/2025
DATE STARTED IN PRODUCTION:		
01/23/2025		



**ULTRA PRESSURE COMPONENTS  
 HOUSTON, TX**

TITLE:  
 3/4" MP Female x 3/4" MP Female  
 20,000 psi

SIZE <b>A</b>	DWG. NO. 5000-12M12M	REV <b>Y</b>
------------------	-------------------------	-----------------

SCALE: 1:1	WEIGHT: 1.08	SHEET 1 OF 1
------------	--------------	--------------

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS  
 DRAWING IS THE SOLE PROPERTY OF  
 ULTRA PRESSURE COMPONENTS. ANY  
 REPRODUCTION IN PART OR AS A WHOLE  
 WITHOUT THE WRITTEN PERMISSION OF  
 ULTRA PRESSURE COMPONENTS IS  
 PROHIBITED.